

HYDAPIPE®

Surface Mounted Shower System

- 1-903S:** Through ceiling piping configuration with soap dish
- 1-903:** Through ceiling piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. All brass, vandal resistant head with ball joint on institutional type head bracket. Attached soap dish and matching cover with ceiling flange to conceal supplies to ceiling. Stainless steel covering to be 18 gauge with #4 brush finish and pre-piped copper tubing assembly.

Modifications:

Flow rate:

- Suffix 1.5:** 1.5 gpm (5.7 L/min) flow restrictor

Valve:

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination
- Suffix WD:** Winter Drain includes relief valve on supply elbow for winter maintenance (for single supply systems only)

Shower head:

- Suffix 270:** All brass, ball joint, adjustable spray with volume control
- Suffix 231:** Super, ball joint, adjustable spray head
- Suffix 221:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

Soap dish:


- Suffix RS:** Recessed soap dish
- Suffix CWM:** Wall mounted cake soap dish

Hand spray accessories:

- Suffix FS:** Hand spray, hose and wall hook
- Suffix FSB:** Hand spray, hose and 30" slide bar for hand spray mounting.
- Suffix OD:** Quick disconnect for hand spray units

Vertical Extension Cover:

- Specify shower head height:** _____
- Specify ceiling height:** _____

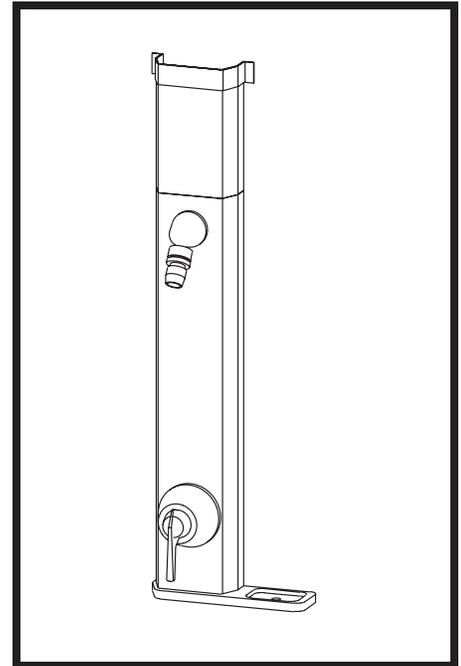

**SYMMONS PRODUCTS MEET
ASME A112.18.1/CSA B125.1
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**



Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621
 Website: symmons.com ■ Email: gethelp@symmons.com

